


6"Dia

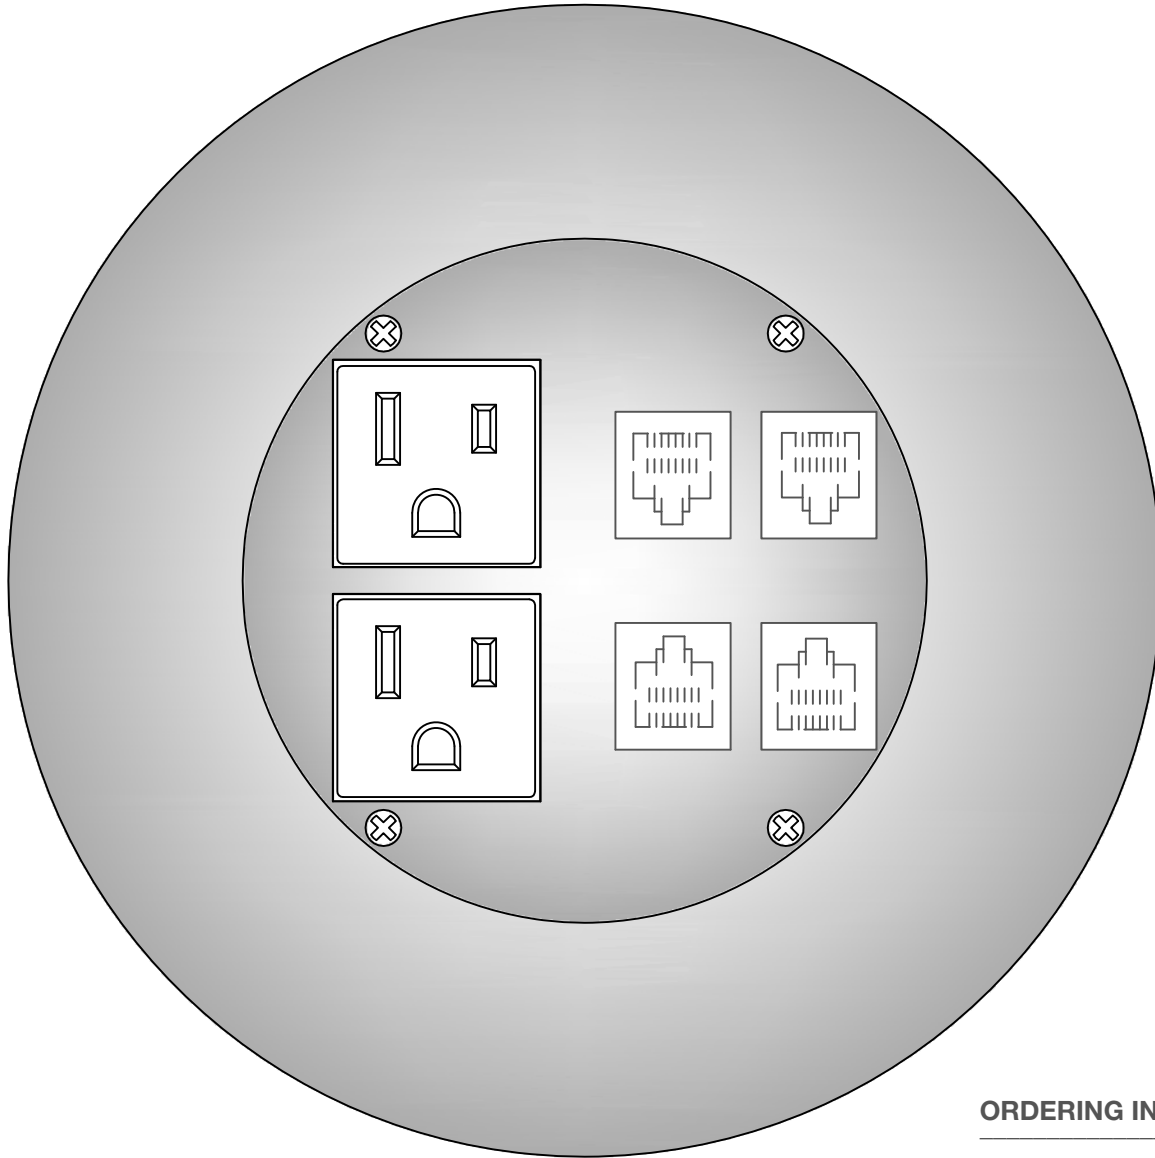

## MOI-PWR2-COMM4

2 openings for single receptacle and 4 openings for COMM jacks  
 (openings suitable for all manufacturers Keystone style jacks)  
 COMM jacks not supplied or installed by Multiconnect.

### NOTE:

Single receptacles shall be 5-15R. 5-20RA available  
 Keystone style jacks shall be CSA / UL Recognized or Listed

### ORDERING INFO

SLAB THICKNESS \_\_\_\_\_ inches

RECEPT. type 20A

FINISH type  
 brass   
 stainless steel   
 blk powder coat   
 (drop cover only)

COVER type  
 drop   
 threaded coin   
 threaded security   
 hinged

		DIMENSIONS ARE IN MM TOLERANCES: ANGLES: ± 1 DEGREE LINEAR: ± 0.1 MM (UNLESS SPECIFIED)	NAME	DATE (yy-mm-dd)
			DRAWN	TJP
			CHECKED	
			ENG. APPR.	
			MFG APPR.	
			Q.A.	
			COMMENTS:	
		MATERIAL		
		See Variant table		
		FINISH		
NEXT ASST	USED ON			
APPLICATION		DO NOT SCALE DRAWING		

JOB TITLE:




630-665-2075      www.lewelectric.com

SIZE	DWG. NO.	REV.
A	MOI-PWR2-COMM4	

SCALE=1:1      WEIGHT:      SHEET 1 OF 3

**PROPRIETARY AND CONFIDENTIAL**  
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MULTICONNECT. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MULTICONNECT IS PROHIBITED.

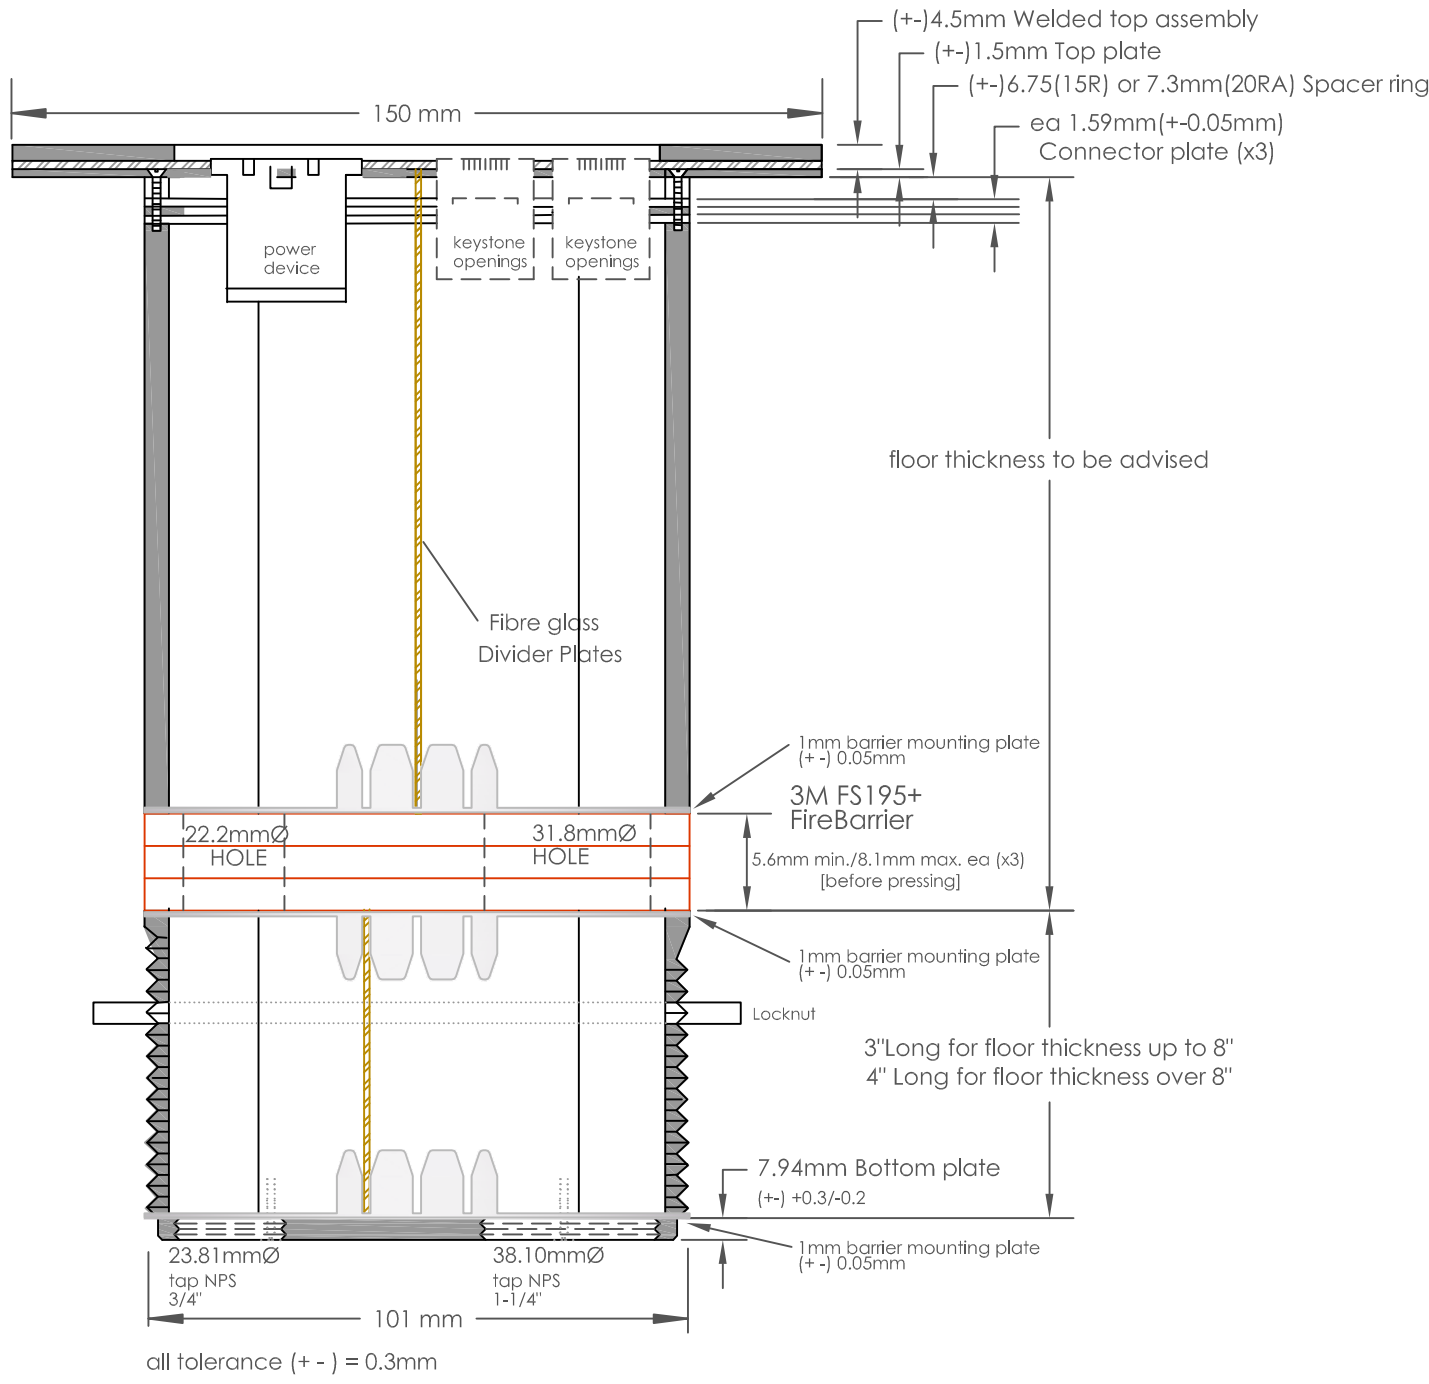

all tolerance (+ -) = 0.3mm

**PROPRIETARY AND CONFIDENTIAL**  
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MULTICONNECT. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MULTICONNECT IS PROHIBITED.

		DIMENSIONS ARE IN MM TOLERANCES: ANGLES: ± 1 DEGREE LINEAR: ± 0.1 MM (UNLESS SPECIFIED)		NAME	DATE	JOB TITLE:
				DRAWN	TJP	
				CHECKED		
				ENG. APPR.		
				MFG APPR.		
				Q.A.		
				COMMENTS:		
NEXT ASST	USED ON	MATERIAL				
		See Varien table				
		FINISH				
APPLICATION		DO NOT SCALE DRAWING				




630-665-2075      www.lewelectric.com

SIZE: A      DWG. NO.: MOI-PWR2-COMM4      REV.

SCALE=n.f.s.      WEIGHT:      SHEET 3 OF 3

COVER PER SUBMITTAL

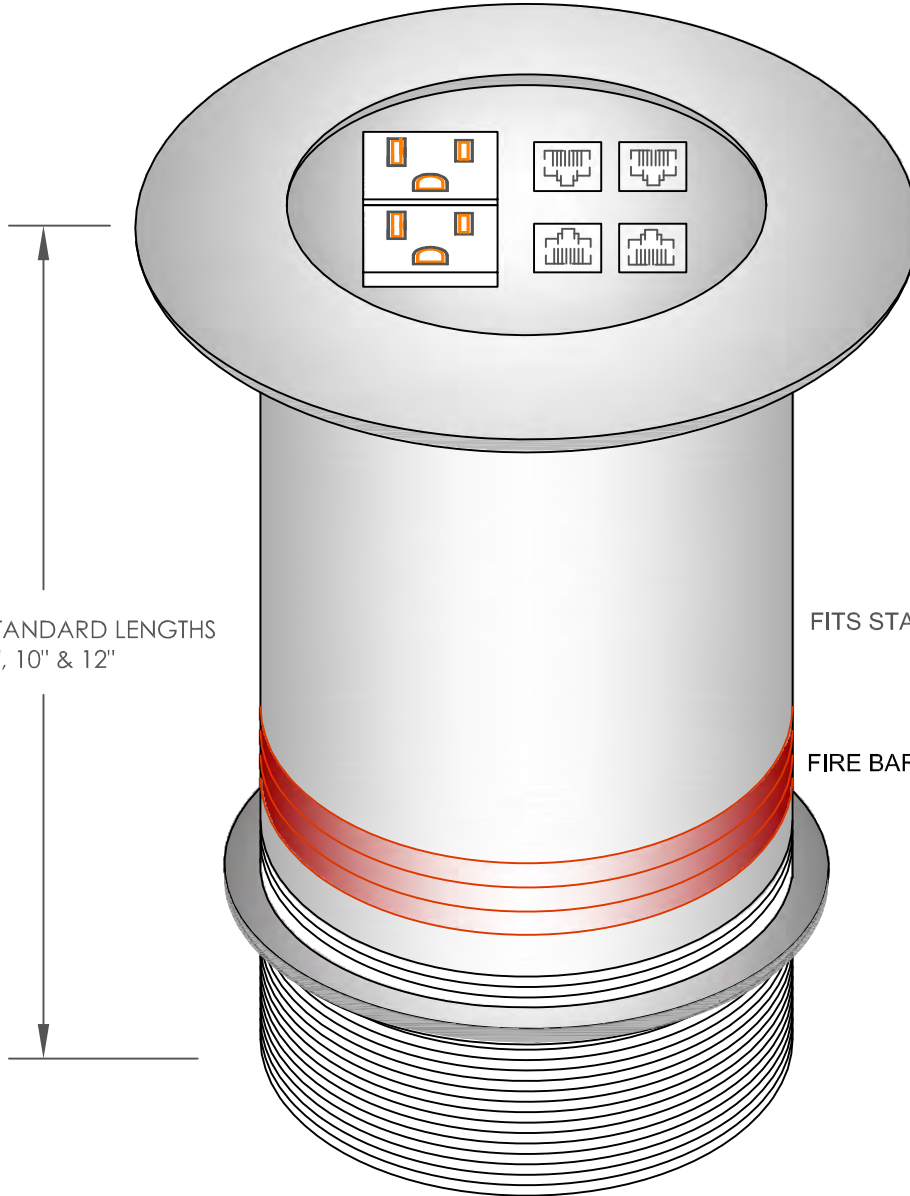


-COMM jacks shall be CSA / UL Recognized or Listed, Keystone style to mount in comm. openings.

STANDARD LENGTHS  
8", 10" & 12"

FITS STANDARD 4" CORED HOLE

FIRE BARRIER-2 HOUR UL

<p><b>PROPRIETARY AND CONFIDENTIAL</b></p> <p>THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MULTICONNECT. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MULTICONNECT IS PROHIBITED.</p>			<p>DIMENSIONS ARE IN MM TOLERANCES: ANGLES: ± 1 DEGREE LINEAR: ± 0.1 MM (UNLESS SPECIFIED)</p>		NAME	DATE (yy-mm-dd)	JOB TITLE:							
					DRAWN	TJP	12-04-24							
					CHECKED									
					ENG. APPR.									
					MFG APPR.									
			Q.A.											
				COMMENTS:										
			MATERIAL	See Variant table				630-665-2075						
			FINISH					www.lewelectric.com						
	NEXT ASST	USED ON						<table border="1"> <tr> <td>SIZE</td> <td>DWG. NO.</td> <td>REV.</td> </tr> <tr> <td>A</td> <td>MOI-PWR2-COMM4</td> <td></td> </tr> </table>	SIZE	DWG. NO.	REV.	A	MOI-PWR2-COMM4	
SIZE	DWG. NO.	REV.												
A	MOI-PWR2-COMM4													
	APPLICATION		DO NOT SCALE DRAWING					SCALE=n.t.s.   WEIGHT:   SHEET 2 OF 3						