

HOW TO ORDER

STEP 1 » Choose Poke Through (MOI) or In Slab (MOI-SLB)



STEP 2 » Choose Configuration *

*Configuration does not include communication components

| | |
|--|--|
| | COMM10 » Ten communication openings |
| | DP1 » Decora receptacle |
| | DP1-COMM4 » Decora receptacle & (4) communication openings |
| | PASS-THROUGH » 2.5" trade size circular opening |
| | PWR2-COMM4 » (2) single receptacle & (4) communication openings |
| | PWR2-COMM4-DB15 » (2) single receptacle & (4) communication openings & (1) DB-15 opening |

| | |
|--|---|
| | PWR2-COMM5 » (2) single receptacle & (5) communication openings |
| | PWR2-COMM6 » (2) single receptacle & (6) communication openings |
| | PWR4 » (4) single receptacle |
| | PWR4-COMM4 » (4) single receptacle & (4) communication openings |
| | SYS-COMM » Systems furniture communication-power & comm cabling |
| | AV-COMM4 » (1) Decora opening for CI-5BWPA & (4) communication openings |

EXAMPLE: For Poke Through » MOI-COMM10; For In Slab » MOI-SLB-COMM10

STEP 3 » Choose Cover Finish




Stainless Steel

Add: **-SS**

Cover Types:

Drop Cover
 Threaded Coin
 Threaded Security
 Articulated Hinged Cover
 Articulated Hinged Cover ¼ Turn



Brass

Add: **-BR**

Cover Types:

Drop Cover
 Threaded Coin
 Threaded Security
 Articulated Hinged Cover
 Articulated Hinged Cover ¼ Turn




Black*

Add: **-BK**

Cover Types:

Drop Cover only

STEP 4 » Choose Cover Type

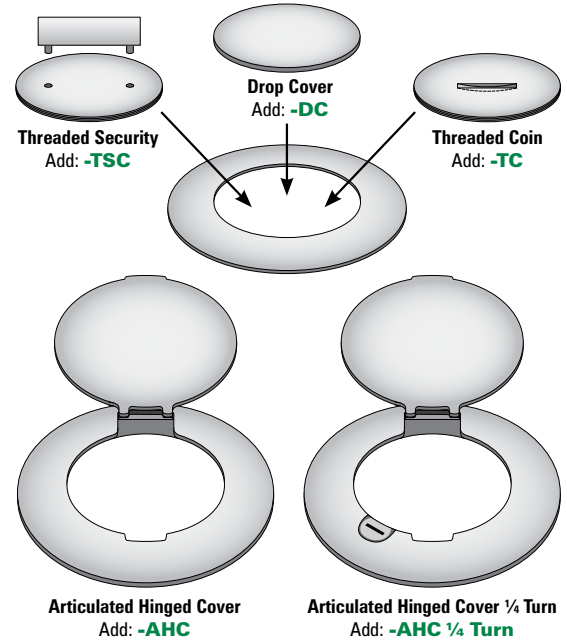

STEP 5 » Specify Slab Thickness

» Must specify when ordering to achieve proper collar size of threaded pipe

EXAMPLE

