


COVER PER SUBMITTAL

6" Dia

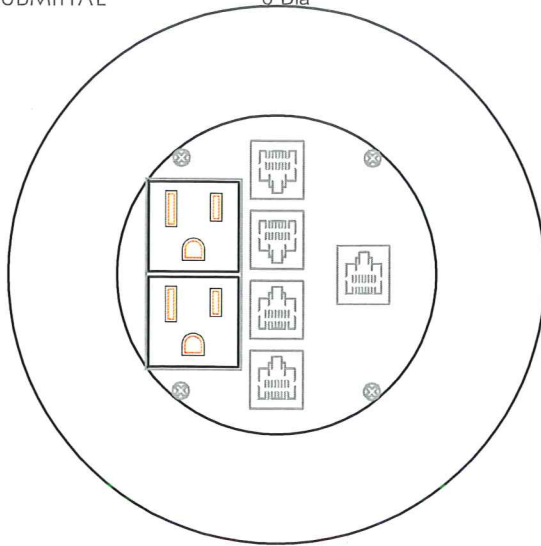

TOP VIEW


**MOI-SLB-PWR2-COMM5**

2 single receptacle and 5 openings for COMM jacks (openings suitable for all manufacturers Keystone style jacks) COMM jacks not supplied or installed by Nocom Inc.

**NOTE:**

Single receptacle(s) shall be 5-15RA. 5-20RA available.

CROSS SECTION

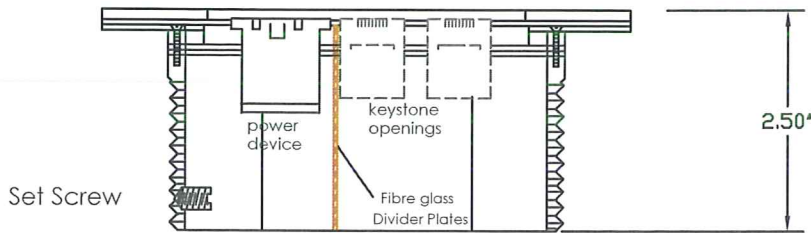

DEVICE MOUNTING BRACKET C/W THREAD HUB AS SHOWN

2.50"

Set Screw


power device

keystone openings

Fibre glass Divider Plates


PLASTIC CONE

Poured in slab

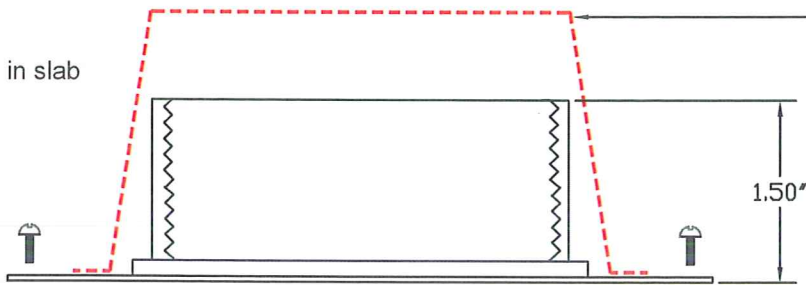

1.50"

8"x8" SCREW ON COVER (4 CORNERS) C/W THREAD HUB AS SHOWN MOUNT +1"min. to 2" max. BELOW NEW TILE

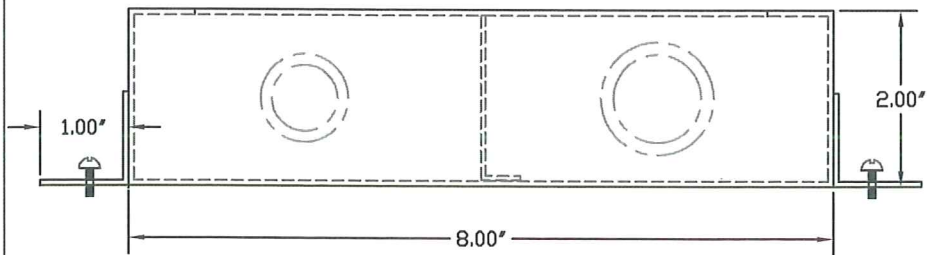


8"x8"x2" STANDARD BOX WITH CENTRE BARRIER C/W 2x[1/2-3/4"] k.o's 2x[3/4"-1"] k.o's

ORDERING INFO-(SEE ABBREVIATIONS)

SLAB THICKNESS \_\_\_\_\_  
 RECEPT.TYPE/colour \_\_\_\_\_  
 DATA MANUF./colour \_\_\_\_\_  
 COVER TYPE \_\_\_\_\_

**NOTE:**

Single receptacles shall be CSA / UL Recognized/Classified or Listed Keystone style openings, blanks or CSA/UL Recognized/ Classified or Listed comm jacks

		DIMENSIONS ARE IN MM TOLERANCES: ANGLES: ± DEGREE LINEAR: ± MM (UNLESS SPECIFIED)		NAME	DATE	JOB TITLE:
				TJP	10-03-02	
		MATERIAL		CHECKED		 <b>877-537-2019 www.lewelectric.com</b>
		See Variant table		ENG. APPR.		
		FINISH		MFG APPR.		
				Q.A.		
PROPRIETARY AND CONFIDENTIAL				COMMENTS:		
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF NOCOM. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF NOCOM IS PROHIBITED.		NEXT ASST	USED ON			SIZE
		APPLICATION		DO NOT SCALE DRAWING		DWG. NO.
						MOI-SLB-PWR2-COMM5
						SCALE= n.i.s.
						WEIGHT:
						REV.
						SHEET 1 OF 1