


6" Dia.

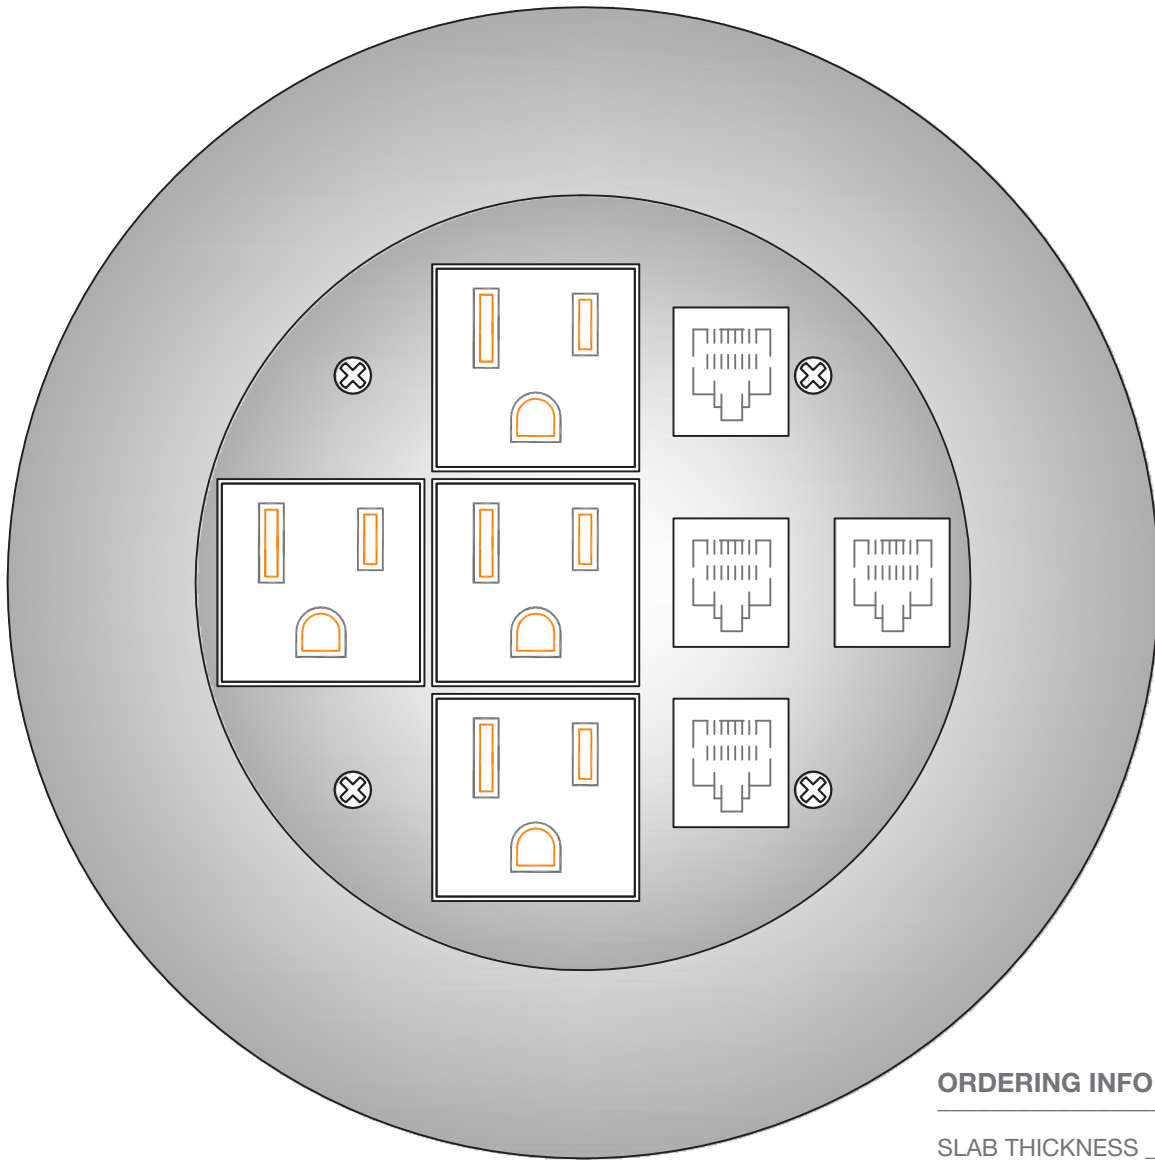

MOI-PWR4-COMM4

4x15Amp single receptacles and 4 openings for COMM jacks
(openings suitable for all manufacturers Keystone style jacks)
COMM jacks not supplied or installed by Multiconnect.

NOTE:

Single receptacles shall be 5-15R, 5-20RA available
Keystone style jacks shall be CSA / UL Recognized or Listed.

ORDERING INFO

SLAB THICKNESS _____ inches

RECEPT. type 20A

FINISH type
brass
stainless steel
blk powder coat
(drop cover only)

COVER type
drop
threaded coin
threaded security
hinged


PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MULTICONNECT. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MULTICONNECT IS PROHIBITED.

		DIMENSIONS ARE IN MM TOLERANCES: ANGLES: ± 1 DEGREE LINEAR: ± 0.1 MM (UNLESS SPECIFIED)	NAME	DATE (yy-mm-dd)	JOB TITLE:
			DRAWN	TJP	12-04-24
			CHECKED		
			ENG. APPR.		
			MFG APPR.		
			Q.A.		
			COMMENTS:		
		MATERIAL See Variant table			
		FINISH			
NEXT ASST	USED ON				
APPLICATION	DO NOT SCALE DRAWING				

LEW ELECTRIC FITTINGS COMPANY
877-537-2019 www.lewelectric.com

SIZE A	DWG. NO. MOI-PWR4-COMM4	REV. R7
SCALE=N.T.S.	WEIGHT:	SHEET 1 OF 3


MOI-PWR4-COMM4

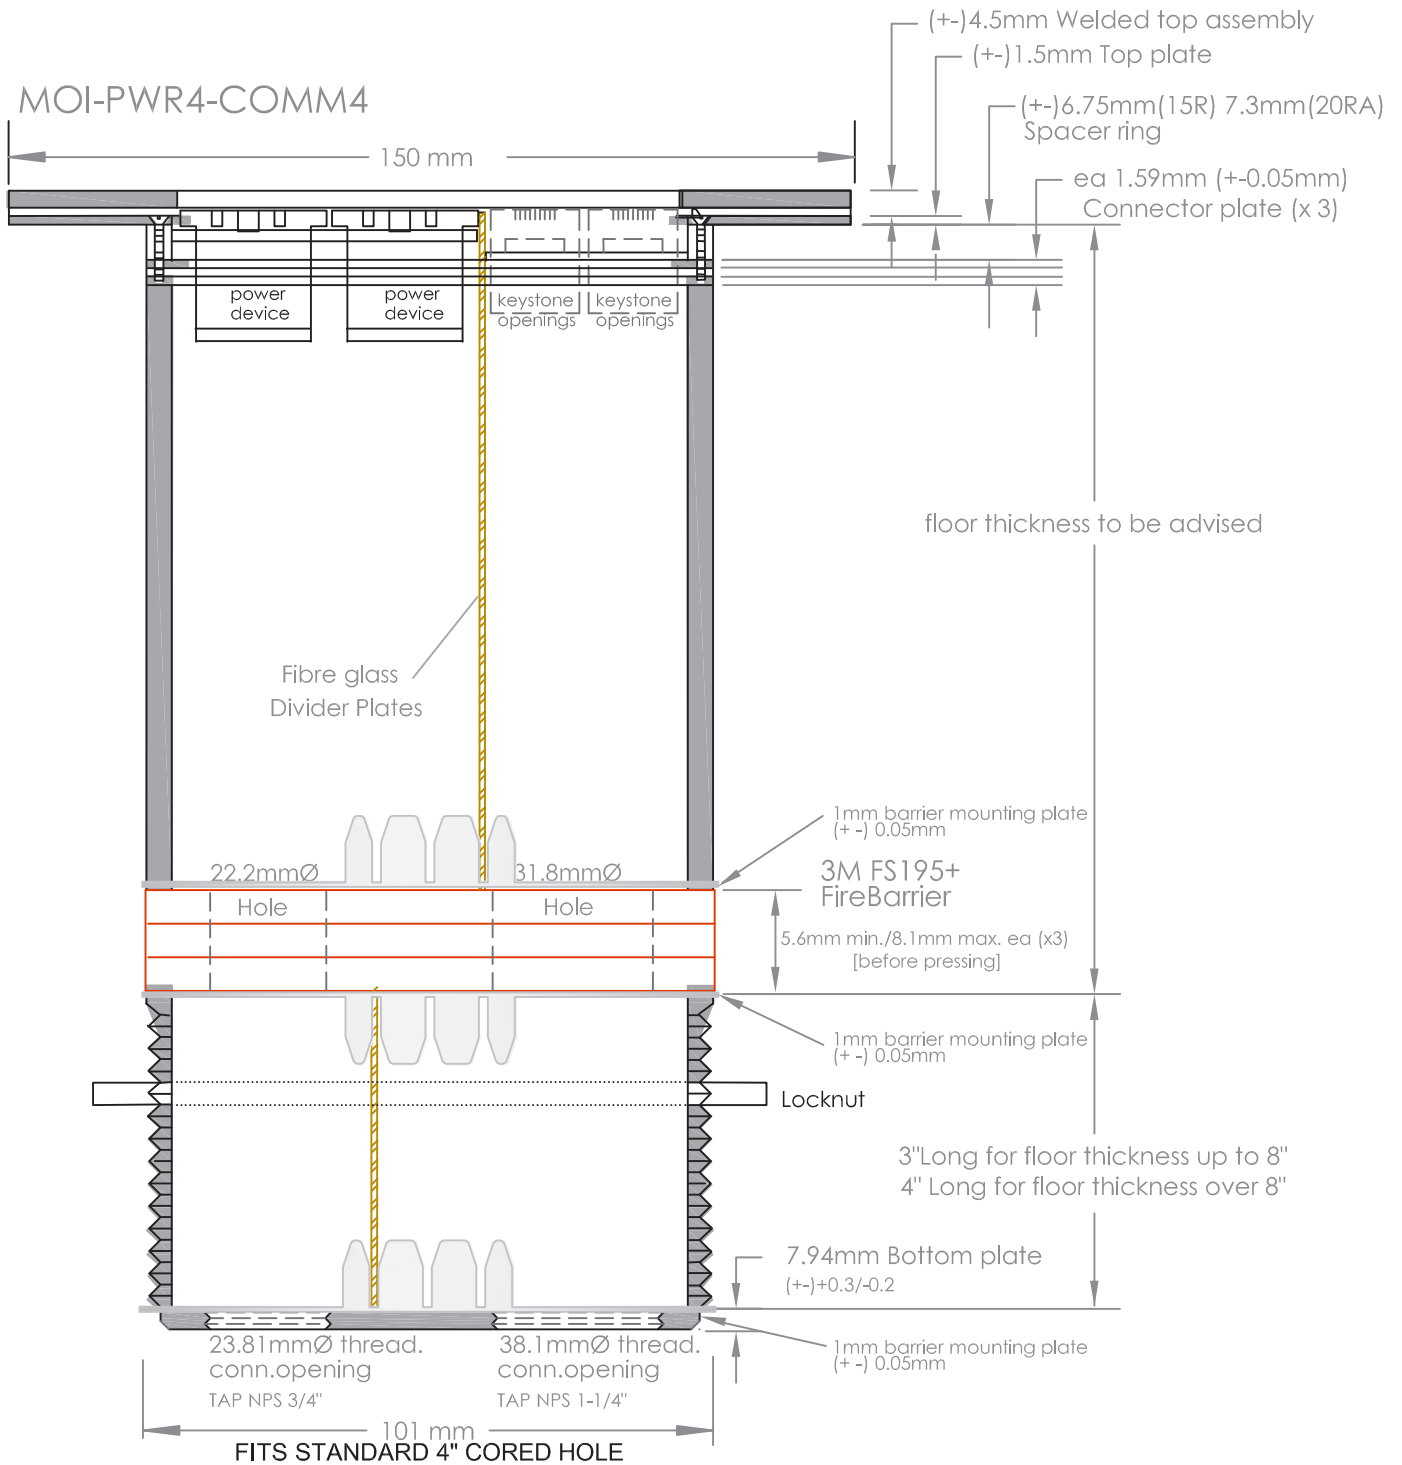

all tolerance (+ -) = 0.3mm

		DIMENSIONS ARE IN MM TOLERANCES: ANGLES: ± 1 DEGREE LINEAR: ± 0.1 MM (UNLESS SPECIFIED)		NAME	DATE (yy-mm-dd)	JOB TITLE:
		MATERIAL See Variant table		DRAWN	TJP	12-04-24
		FINISH		CHECKED		
NEXT ASST		USED ON		ENG. APPR.		
APPLICATION		DO NOT SCALE DRAWING		MFG APPR.		
				Q.A.		
				COMMENTS:		
				<p>LEW ELECTRIC FITTINGS COMPANY 877-537-2019 www.lewelectric.com</p>		
<p>PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MULTICONNECT. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MULTICONNECT IS PROHIBITED.</p>				SIZE	DWG. NO.	REV.
				A	MOI-PWR4-COMM4	R8
				SCALE=N.T.S. WEIGHT:		SHEET 3 OF 3

COVER PER SUBMITTAL

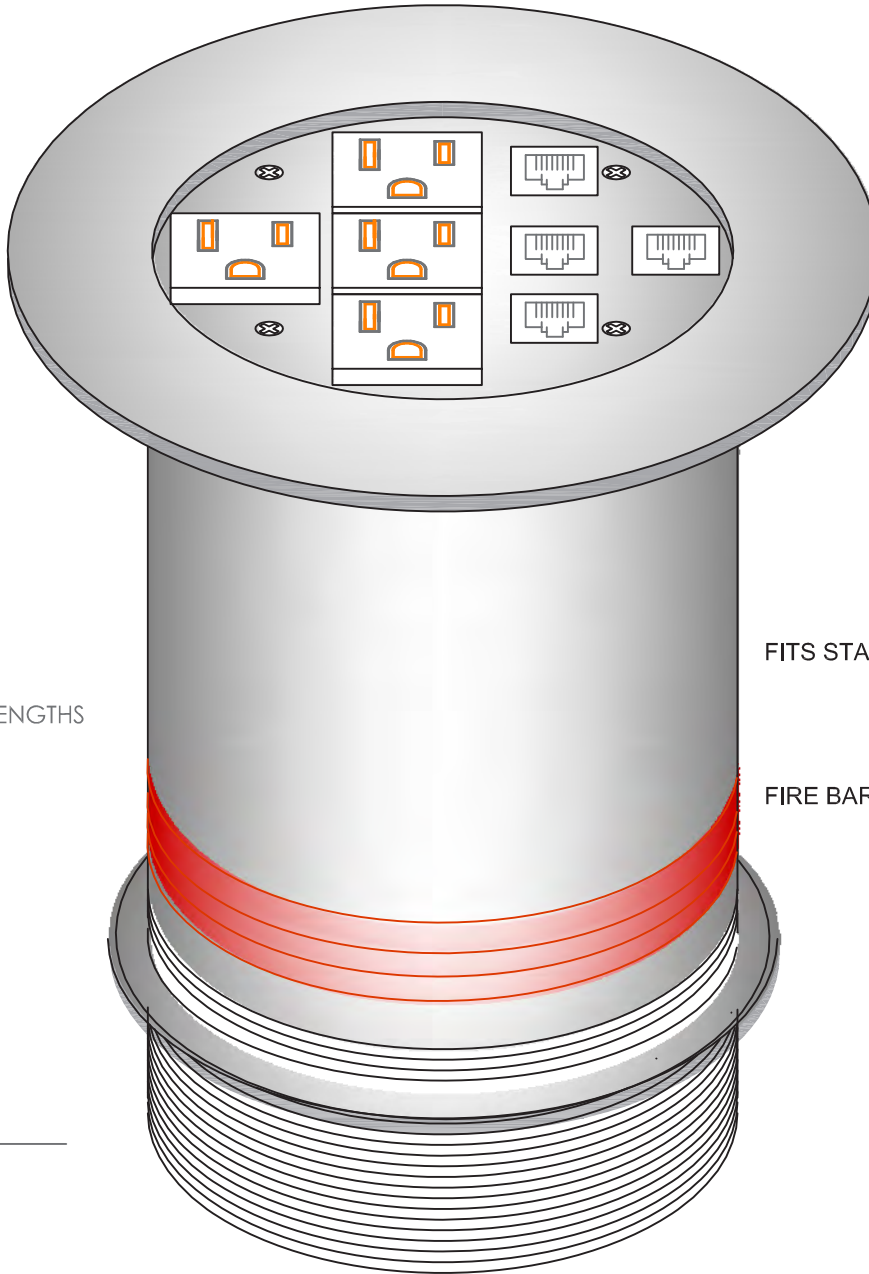


-COMM jacks shall be CSA / UL Recognized or Listed, Keystone style to mount in comm. openings.

STANDARD LENGTHS
8", 10" & 12"

FITS STANDARD 4" CORED HOLE

FIRE BARRIER-2 HOUR UL

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MULTICONNECT. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MULTICONNECT IS PROHIBITED.

		DIMENSIONS ARE IN MM TOLERANCES: ANGLES: ± 1 DEGREE LINEAR: ± 0.1 MM (UNLESS SPECIFIED)	NAME	DATE	JOB TITLE:	
			DRAWN	TJP		12-04-24
			CHECKED			
			ENG. APPR.			
		MATERIAL	COMMENTS:			
		See Variant table				
NEXT ASST	USED ON	FINISH				
APPLICATION		DO NOT SCALE DRAWING				
		 LEW ELECTRIC FITTINGS COMPANY		877-537-2019 www.lewelectric.com		
SIZE	DWG. NO.	REV.				
A	MOI-PWR4-COMM4	R7				
SCALE=N.T.S.		WEIGHT:			SHEET 2 OF 3	